


BASIC INFORMATION ABOUT THE PRODUCT



- Convenient cleaning of the cooker by means of the ash pan located under the grate.
- Easy firing is guaranteed by the cast-iron grate with independent aeration.
- The cooker's exceptional longevity is achieved through a design that makes use of multi-plane bending of the steel from the largest possible pieces.
- The small size of the cooker and the low value of the lower heating power range make the cooker ideal for smaller rooms.
- There is a possibility of connecting the flue from the top or the back of the cooker with a solid cast iron flue.
- If the flue outlet is connected at the rear, it is possible to use the upper heating plate.
- The cooker is made of high quality P265GH boiler steel.
- The cooker is equipped with an air guide to keep the glass clean made of heat-resistant ceramic glass used in all Hitze fireplaces (up to 800 degrees C).
- The use of two deflectors (ceramic and steel) ensures ecological combustion..

| | |
|---------------------------------|-------------|
| Nominal power [kW] | 6,5 |
| Heating load range [kW] | 3-8,5 |
| Thermal efficiency [%] | 84 |
| CO emissions (at 13% O2) [g/m3] | 0,026 |
| Pollen emission [g/m3] | 0,948 |
| Average fuel consumption [kg/h] | 1,86 |
| Glass dimensions [mm] | 424x535x428 |
| Flue diameter [mm] | 150 |
| Inlet diameter [mm] | 123 |
| Weight [kg] | 163 |
| Efficiency factor | 111,8 |



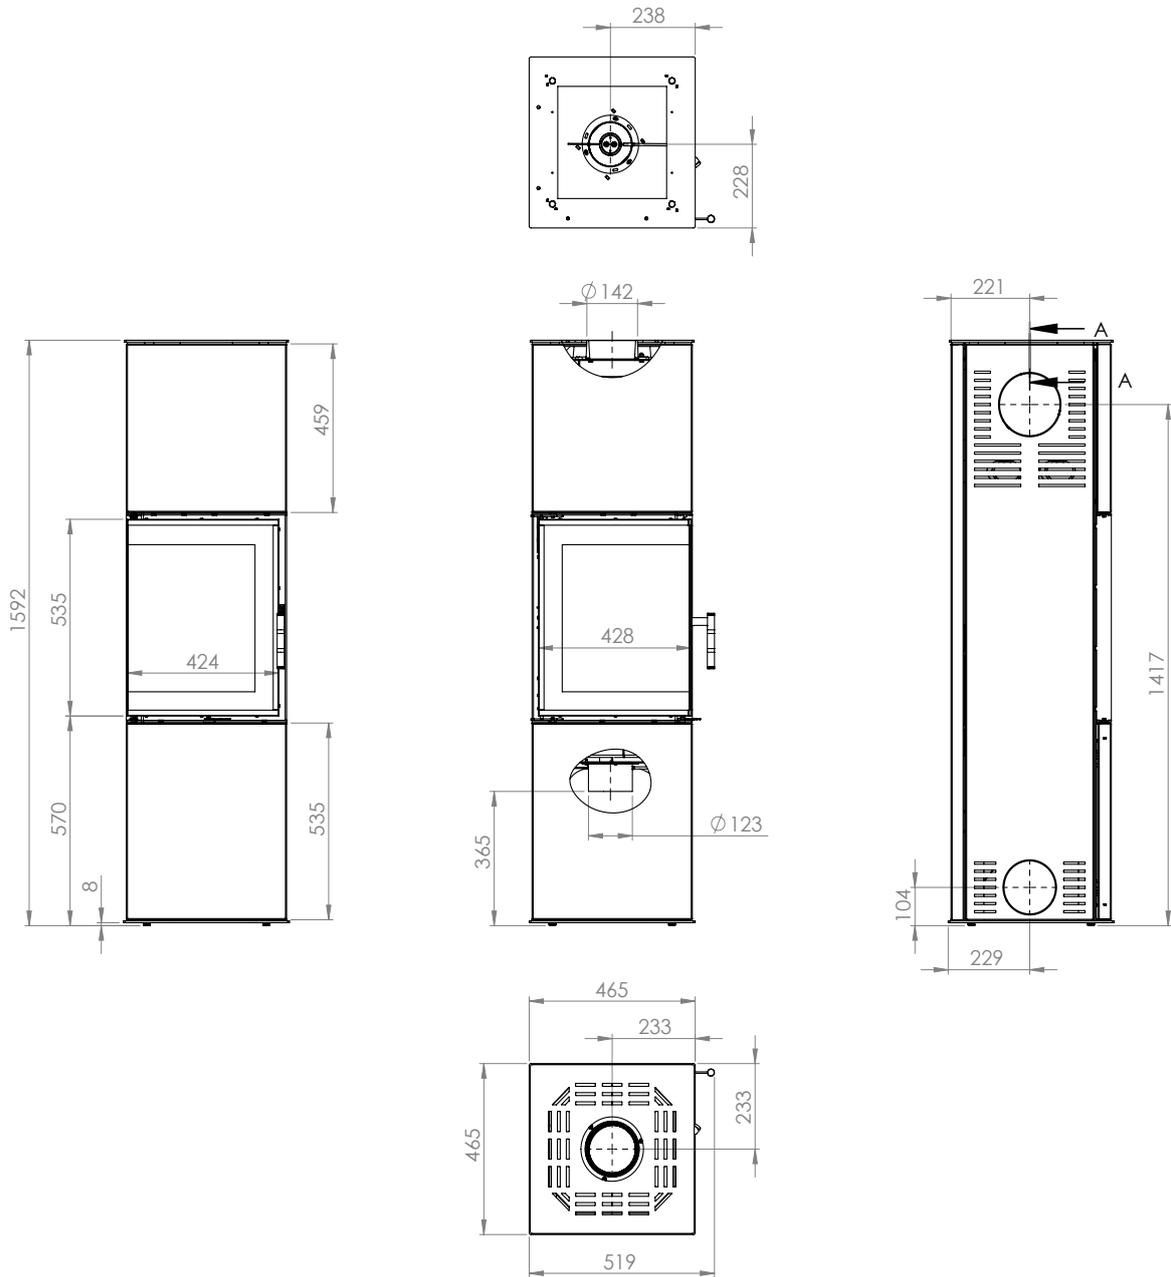

GABI